

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01Q 9/36, 11/08, 1/24, 9/14		A1	(11) International Publication Number: WO 98/31069 (43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/IL98/00004 (22) International Filing Date: 5 January 1998 (05.01.98) (30) Priority Data: 119973 7 January 1997 (07.01.97) IL (71) Applicant: GALTRONICS LTD. [IL/IL]; P.O. Box 1589, 14115 Tiberias (IL). (72) Inventors: CHUFAROVSKY, Alexander; Apartment #141, 20651 Forge Way, Cupertino, CA 95014 (US). ARNS, Anthony, Dean; 18907 71st Street Court KPN, Vaughn, WA 98394 (US). (74) Agents: COLB, Sanford, T. et al.; Sanford T. Colb & Co., P.O. Box 2273, 76122 Rehovot (IL).		(81) Designated States: BR, CA, CN, JP, KR, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>	
(54) Title: HELICAL ANTENNA ELEMENT			
(57) Abstract <p>A helical antenna element including a metallic coil, a dielectric support element inserted in the coil, the support element being formed with a generally hollow core, and a dielectric tuning element inserted into said core, the tuning element having at least one adjustable dimension which when adjusted, provides a tuning of an antenna characteristic.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HELICAL ANTENNA ELEMENT

FIELD OF THE INVENTION

The present invention relates to antennas generally and more particularly to helical antenna elements encapsulated in plastic and to methods of manufacture thereof.

BACKGROUND OF THE INVENTION

5 Helical antenna elements encapsulated in plastic are well known. Some examples include United States Patent 5,341,149 which describes an antenna rod with an antenna lead encapsulated in a layer of polymer material. United States Patent 5,469,177 describes a helical antenna with a shaft translatable between a retractable position and a protractible position. PCT WO 95/08853 patent application describes a helical antenna with a variable reactance tuner. United States Patent 4,725,395 describes a method for producing a helical antenna wherein a solid dielectric material is injection molded into a coil and an outer cover is injection molded over the coil and dielectric material.

15 The prior art suffers from several problems. It is desirable to completely encapsulate the helical antenna element in plastic, because the prior art has shown that this improves mechanical properties, particularly resistance to bend and impact. It is further desirable to maintain constant pitch and length of the helical coil constant during the encapsulation process, so as to produce an antenna with consistent frequency response. The prior art suggests several solutions to accomplish this. It has been found in practice, however, 20 that maintaining the pitch and length within the required limits does not always result in antennas with the required frequency response. It is common knowledge that a thin helical antenna has narrow band width. Typically, tuning operations are applied to the helical coil before or after the encapsulation to fine tune the frequency response. However, fine tuning of the helical coil element is a cumbersome operation because the material of the element is 25 typically a hard steel and it is difficult to cut a small amount of wire.

SUMMARY OF THE INVENTION

The present invention seeks to provide an improved helical antenna element encapsulated in plastic and a method of manufacture thereof.

30 The present invention circumvents the need for tuning a helical coil element by providing a novel method and apparatus to shift a frequency response after an encapsulation process.

There is thus provided in accordance with a preferred embodiment of the present invention, a helical antenna element including a metallic coil, a dielectric support

element inserted in the coil, the support element being formed with a generally hollow core, and a dielectric tuning element inserted into said core, the tuning element having at least one adjustable dimension which when adjusted, provides a tuning of an antenna characteristic.

In accordance with a preferred embodiment of the present invention, the tuning
5 element has a plurality of grooves formed therein which define a plurality of sections which may be selectively removed from the tuning element.

Preferably the helical antenna element is molded over with a plastic. The helical antenna element may be attached to a whip element.

BRIEF DESCRIPTION OF THE DRAWINGS

10 The present invention will be understood and appreciated more fully from the following detailed description, taken in conjunction with the drawings in which:

Figs. 1 - 6 are simplified illustrations of a helical antenna element and a method of manufacturing therefor, in accordance with a preferred embodiment of the present invention, wherein:

15 Fig. 1 is a simplified, exploded, partially sectional illustration of a portion of a helical antenna element, constructed and operative in accordance with a preferred embodiment of the present invention;

Fig. 2 is a simplified, partially sectional illustration of assembling a whip element with a metallic member of the helical antenna element;

20 Fig. 3 is a simplified illustration of an antenna subassembly of the helical antenna element with an overmold section formed by injection molding;

Figs. 4 and 5 are simplified illustrations of a tuning element, constructed and operative in accordance with a preferred embodiment of the present invention, respectively before and after insertion into the antenna subassembly of Fig. 3; and

25 Fig. 6 is a simplified illustration of a finished helical antenna element, constructed and operative in accordance with a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Figs. 1 - 6 which illustrate a helical antenna element
30 10 and a method of manufacturing therefor, in accordance with a preferred embodiment of the present invention.

Helical antenna element 10 preferably includes a plastic coated whip element 12 which is provided with a metal core 14, exposed at an upper end thereof.

A metallic member 20 is preferably provided which includes an upper barrel 22 with a recess 24 formed therein, and a lower, hollow cylindrical flange 26 which protrudes from barrel 22. Barrel 22 preferably has a larger outer diameter than an outer diameter of flange 26. As seen in Fig. 2, exposed upper end 14 of whip element 12 is preferably inserted into flange 26 and crimped therewith, as seen at reference numeral 27, thereby securing whip element 12 to metallic member 20.

A helical coil 30 (Figs. 1 and 2) is preferably connected to metallic member 20, such as by screwing a lower end 32 of coil 30 into recess 24 and crimping metallic member 20 over end 32. A dielectric support member 40 formed with a generally hollow core 42 is preferably inserted into an upper end 34 (Fig. 1) of coil 30. Support member 40 may be constructed of materials such as a low loss thermoplastic elastomer. Support member 40 is preferably screwed into coil 30 until it abuts metallic member 20.

The above assembly is then placed in a mold (not shown) for injection of a plastic material over the assembly. The plastic material for injection molding may be selected from the same families of plastics/polymers suitable for support member 40. During the injection process, a metal rod (not shown) is preferably inserted into hollow core 42 in order to maintain concentricity during the mold process. As seen in Fig. 3, the molding process produces an antenna subassembly with an overmold section 44.

Referring now to Figs. 4 and 5, a dielectric tuning element 50 is preferably provided with a shoulder 52. Tuning element 50 may be constructed from the same families of dielectric plastics/polymers suitable for support member 40, and can be fabricated in a variety of shapes and sizes. A plurality of grooves 54 are preferably formed along tuning element 50 thereby defining a plurality of sections 56 along the length of tuning element 50. As seen in Fig. 5, tuning element 50 is preferably inserted into hollow core 42 of support member 40 until shoulder 52 seats against an upper surface 58 of overmold section 44.

At this point, the antenna subassembly can be tested to see if a frequency response is within required limits. If the frequency response is not within the required limits, tuning element 50 can be removed, cut along one of grooves 54 to remove one or more sections 56, and reinserted into hollow core 42. The removal of sections 56 reduces the amount of dielectric material inside coil 30, thereby causing a frequency shift. The process of removing sections 56 is repeated until the desired frequency response is obtained. The antenna assembly with tuning element 50 in place is then inserted into another injection mold (not shown) to close the end of the antenna assembly with an end cap 60, thereby completing the

fabrication of helical antenna element 10, illustrated in Fig. 6. Shoulder 52 of tuning element 50 prevents material from entering into hollow core 42 during the molding process.

It is appreciated that various features of the invention which are, for clarity, described in the contexts of separate embodiments may also be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment may also be provided separately or in any suitable subcombination.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described hereinabove. Rather the scope of the present invention is defined only by the claims which follow:

C L A I M S

What is claimed is:

1. A helical antenna element comprising:
a metallic coil;
5 a dielectric support element inserted in said coil, said support element being formed with a generally hollow core; and
a dielectric tuning element inserted into said core, said tuning element having at least one adjustable dimension which when adjusted, provides a tuning of an antenna characteristic.
10
2. A helical antenna element according to claim 1 wherein said tuning element has a plurality of grooves formed therein which define a plurality of sections which may be selectively removed from said tuning element.
- 15 3. A helical antenna element according to claim 1 or claim 2 wherein at least one portion of said helical antenna element is molded over with a plastic.
4. A helical antenna element according to any of the preceding claims wherein said helical antenna element is attached to a whip element.
20
5. A helical antenna element according to any of the preceding claims and wherein said tuning element comprises apparatus which substantially prevents material from entering into said hollow core during overmolding of a portion of said helical antenna element.
- 25 6. A method for fine-tuning an overmolded helical antenna element comprising:
performing a low preliminary tuning of said antenna element;
overmolding at least a portion of said antenna element;
inserting a tuning element into a portion of said antenna element to fine-tune said antenna element.
30
7. A method according to claim 6 wherein said inserting causes a change in a frequency response of said antenna element.

1/2

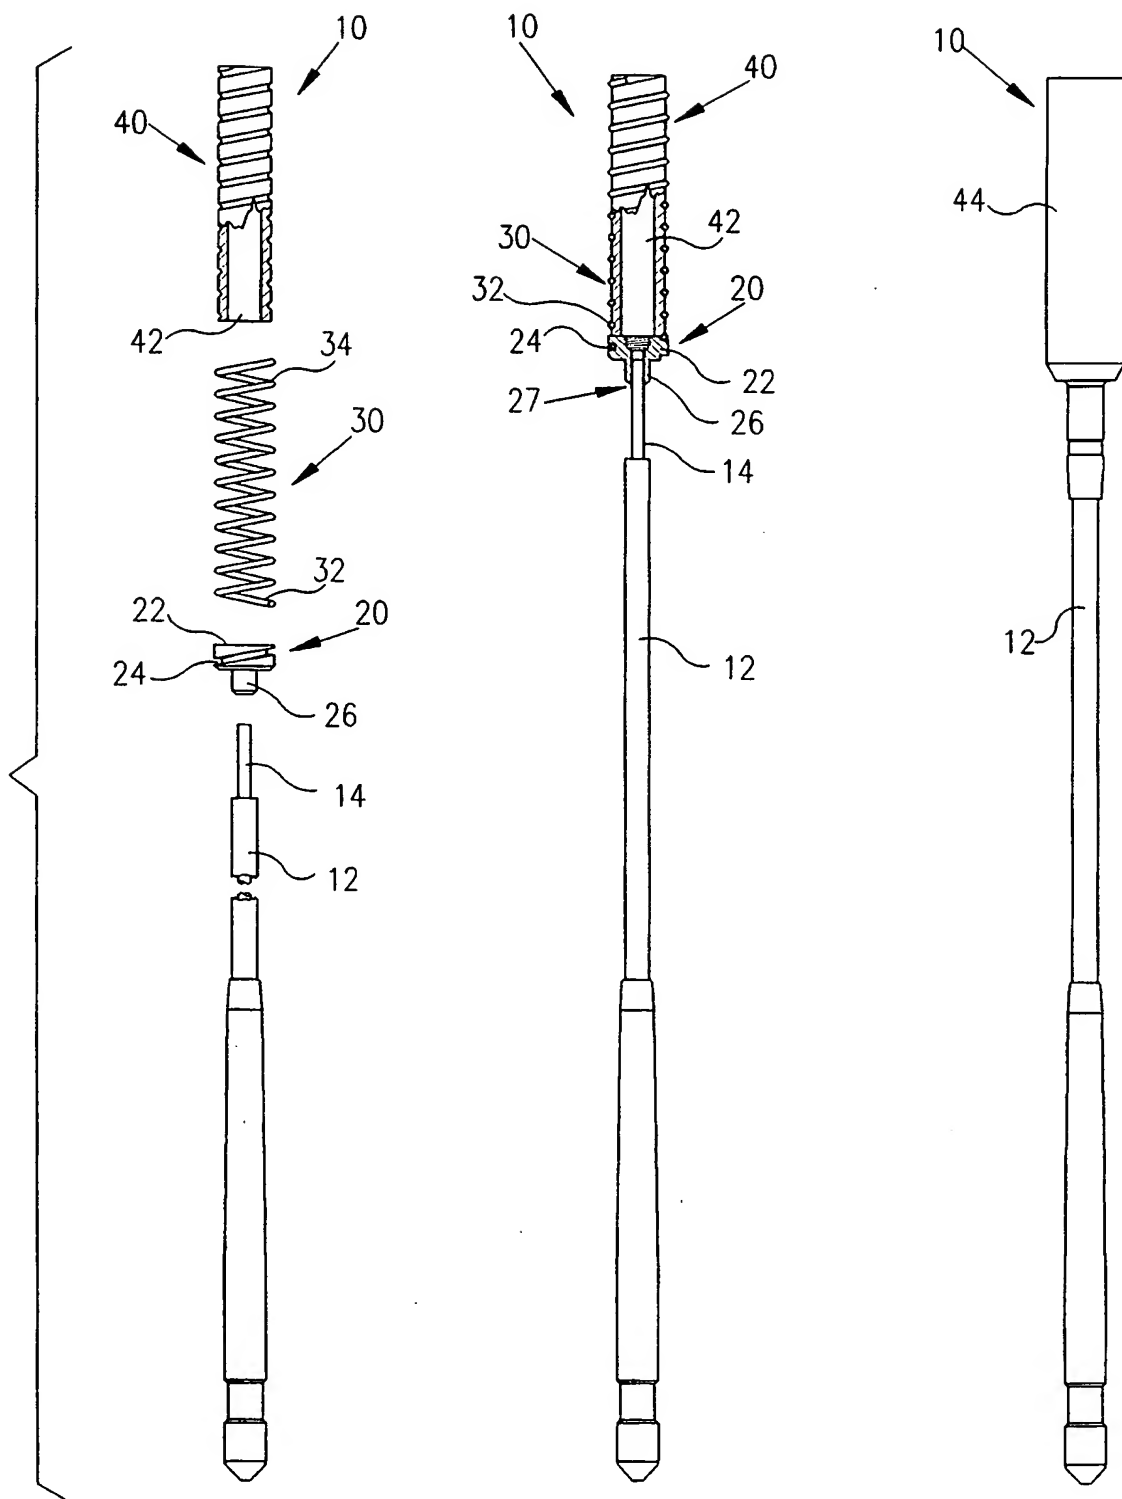


FIG. 1

FIG. 2

FIG. 3

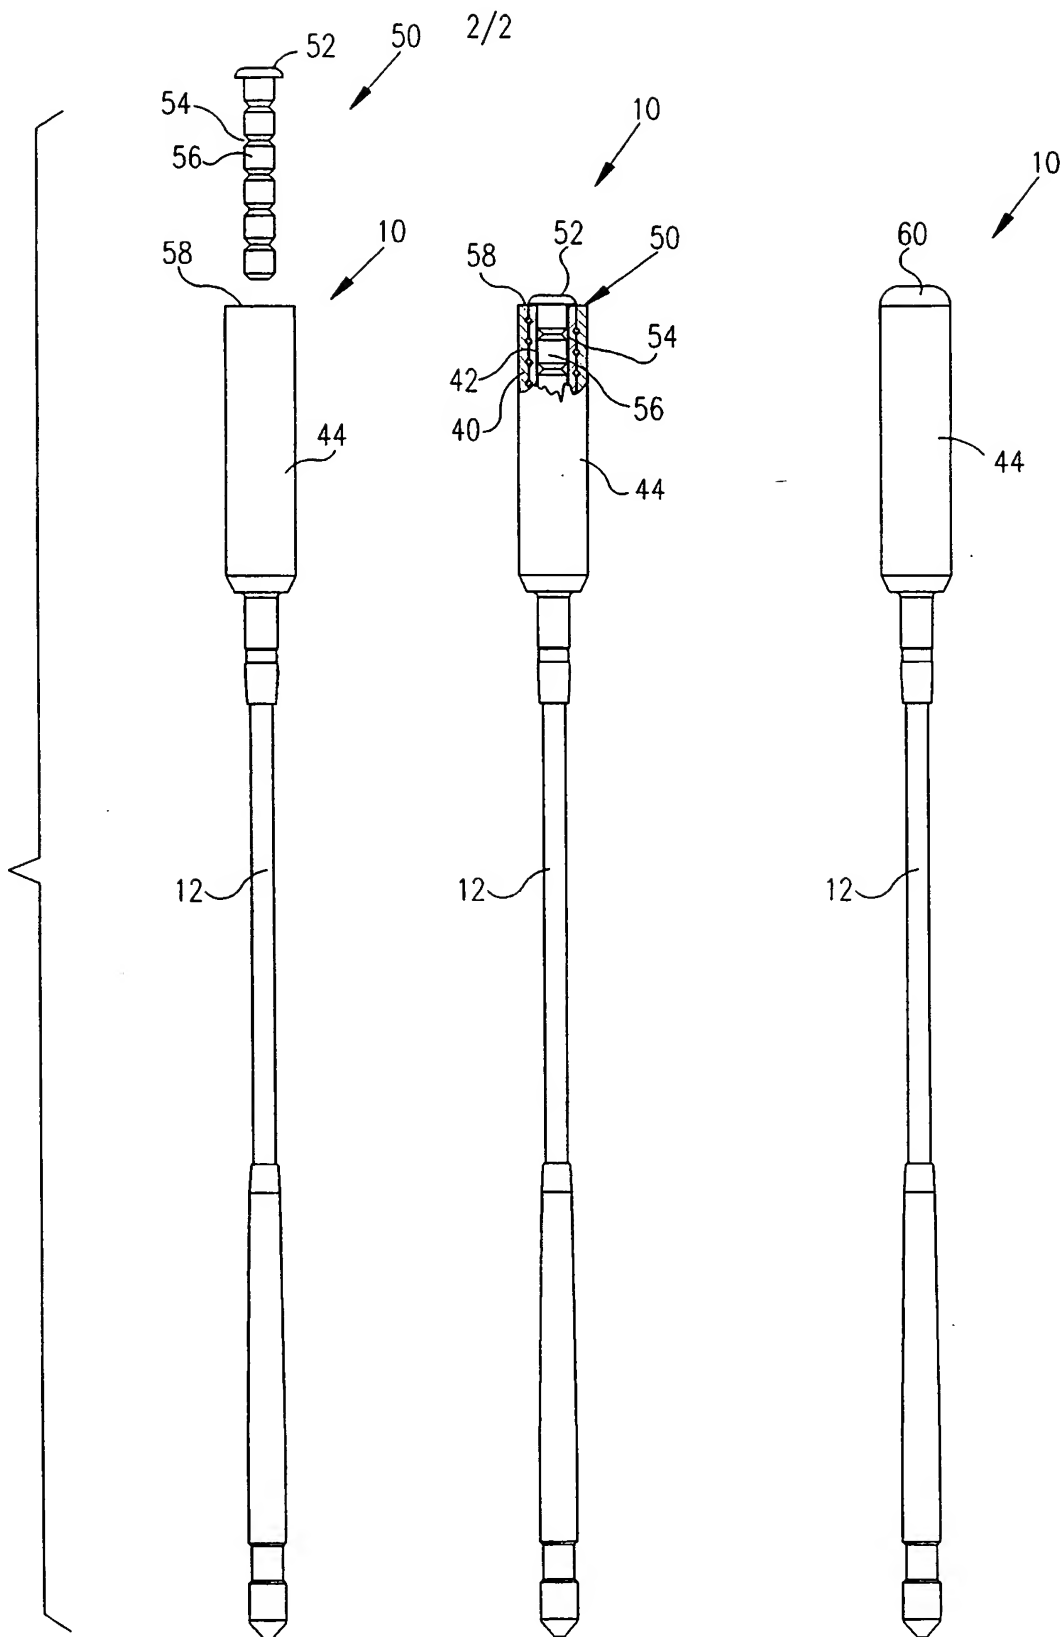


FIG. 4

FIG. 5

FIG. 6

PCT/IL 98/00004

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H0109/36 H01011/08 H0101/24 H0109/14

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H010

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 214 247 A (RICHMOND THOMAS A) 22 July 1980 see the whole document	1,3,4,6, 7
A	---	2,5
X	US 4 379 298 A (VINCENT RICHARD G ET AL) 5 April 1983 see the whole document	1,3,4,6, 7
Y	WO 96 21254 A (BICKERT PAUL FRANCIS ;MURRAY DANIEL BRUCE (CA)) 11 July 1996 see page 26, line 8 - page 27, line 10; figures 5,8	1,3,4,6, 7
Y	US 2 895 129 A (KAMEN I; ANGELASTRO S P) 14 July 1959 see column 4, line 12-26; figure 3	1,3,4,6, 7

	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

5 March 1998

Date of mailing of the international search report

16/03/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, G

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/IL 98/00004

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 469 177 A (RUSH TONYA A ET AL) 21 November 1995 cited in the application see column 4, line 21-34; figure 4 -----</p>	4

1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

page 2 of 2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL 98/00004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4214247 A	22-07-80	NONE	
US 4379298 A	05-04-83	NONE	
WO 9621254 A	11-07-96	CA 2139682 A AU 4325896 A CA 2209019 A EP 0801820 A	06-07-96 24-07-96 11-07-96 22-10-97
US 2895129 A	14-07-59	NONE	
US 5469177 A	21-11-95	AU 7476794 A CA 2146925 A CN 1114517 A FR 2710194 A GB 2287130 A,B IT RM940579 A,B JP 8503356 T WO 9508199 A ZA 9406369 A	03-04-95 23-03-95 03-01-96 24-03-95 06-09-95 15-03-95 09-04-96 23-03-95 11-05-95